COATS & CLARK'S SKIRT ZIPPER

Extra strong with automatic lock . . . enamel does not chip or fade (Bondfast®).

CAUTION . . . keep zipper closed when washing or dry-cleaning . . . open zipper all the way when putting on and taking off a garment . . . close zipper after taking off garment.

IMPORTANT *Prepare the opening*

- Length of opening must equal metal part of zipper with tab turned up **plus** seam allowance at waist.
- Machine-baste opening together (longest stitch).
- Widen front edge of opening with seam tape. Topstitch close to edge of tape.
- Press basted seam open.
- **Always stitch on inside of garment, from bottom to top of opening.**

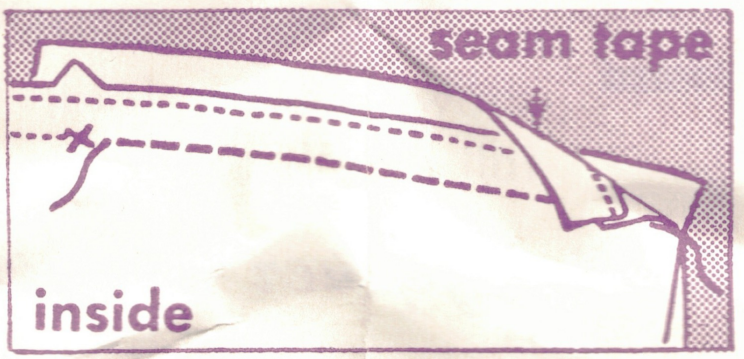

- Directions for sewing in zipper on reverse side.

COATS & CLARK Inc., Dept. Z, Box 495, Fair Lawn, N. J.

©1959, Coats & Clark Inc.

Printed in U.S.A.

COATS & CLARK'S ZIPPERS

are unconditionally guaranteed. If for any reason this zipper fails to give complete satisfaction, return it to your dealer or to us for exchange or refund.

PREPARE THE OPENING — see other side

Stitch zipper to back seam allowance.

1 Put zipper in place face-down, **full width** of chain on back seam allowance, edge of chain against seam line. Stitch with regular presser foot, edge of foot against chain. Check every 2″ to 3″ as shown.

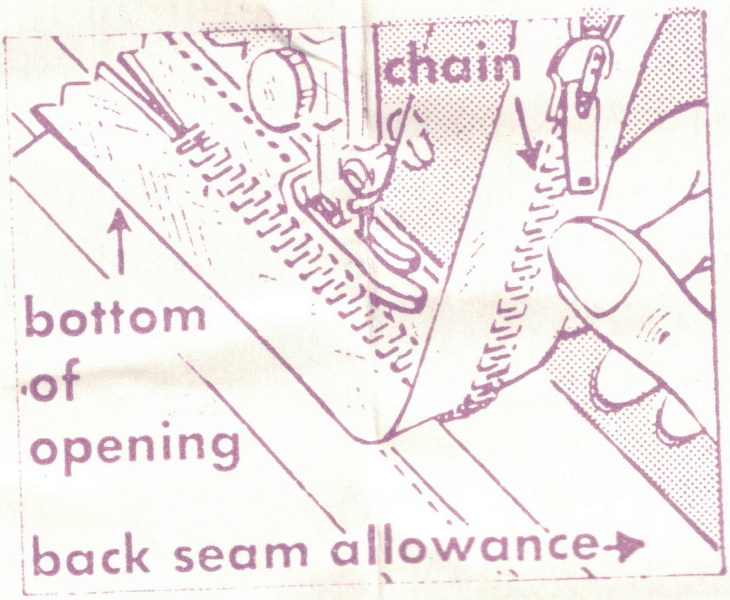

Topstitch back seam allowance

2 Change to zipper foot. Turn zipper so that it is right side up, folding seam allowance close to zipper chain. Stitch as shown along fold, the full length of tape.

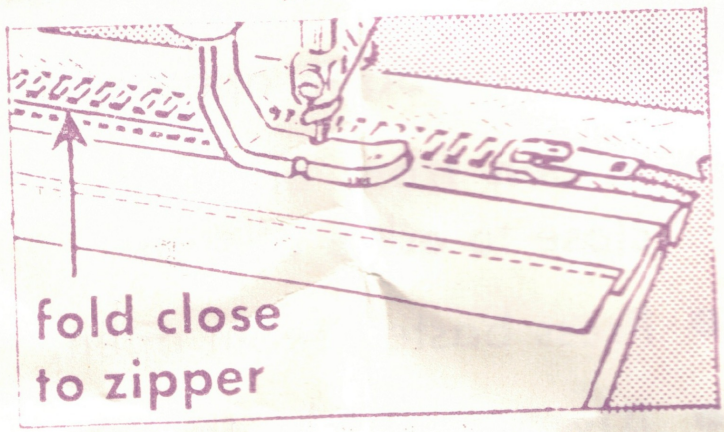

Stitch zipper to skirt front

3 Arrange garment with zipper face-down over front seam allowance, forming a pleat at placket-end as shown. Stitch from side seam across bottom and along zipper close to chain.

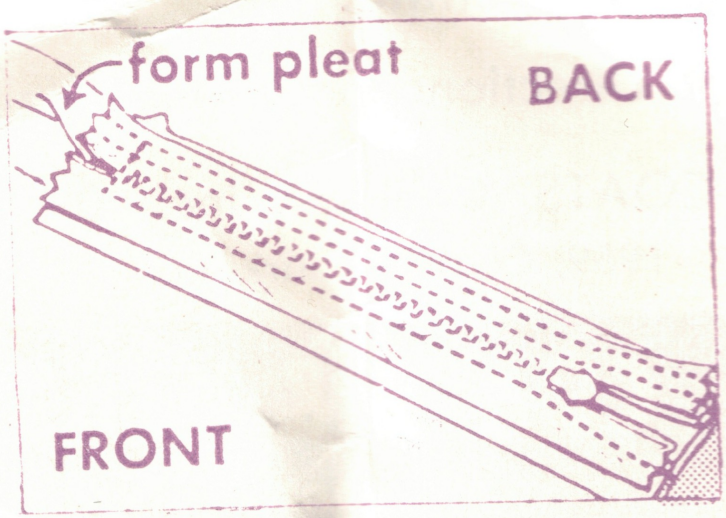

Press placket on wrong side. Remove machine-basting, clipping stitches every few inches. Press placket on outside.